

AD1-125MC

Energy Meters Single-Phase

Application

The energy-meters “with a green back-lighted LCD screen for perfect reading” are used to measure single-phase like in Residential, Utility and Industrial applications.

Monitoring of the energy-consumption goes via a S0 pulse output. The products can be set up to communicate with the Modbus RS485 Autometers Protocol V6 interface, used to analyze the energy-consumption to reduce the running cost to a minimum for Industrial plants and buildings like Offices, Hospitals, Universities etc.



Overview

Active energy-meters for single-phase alternating current with either 1, 7 digits digital counters.

These meters have 2 S0 output generating pulses for remote processing of the energy active and reactive measurements for 2 tariff.

Function

Display		Unit	ID
Active Energy	Tariff 1	(M) (k) Wh	Energy absorbed or supplied
	Tariff 2	(M) (k) Wh	Energy absorbed or supplied
Reactive Energy	Tariff 1	(M) (k) varh	Energy absorbed or supplied
	Tariff 2	(M) (k) varh	Energy absorbed or supplied
Active Power		(M) (k) W	Utilisation and Instantaneous Value
Reactive Power		(M) (k) var	Utilisation and Instantaneous Value
Connection Errors			Phase I or

Communication Modules



Modbus RS485
Autometers Protocol V6

3 Standard Module Housing Suitable for DIN Rail Mounting

Direct Connection 125 A

Technical Data

Data in compliance with EN 50470-3, EN 50470-3, EN 62053-23 and EN 62053-31

General Characteristics

• Housing	DIN 43880	DIN
• Mounting	EN 60715	35mm
• Depth		mm
• Reference Standard	Active Energy Reactive Energy - Pulse Output	-

Operating Features

• Connectivity	o Single/Three-phase Network	N° Wires
• Storage of Energy Values and Configuration	Digital Display (EEPROM)	
• Display Tariffs Identifier	For Active & Reactive Energy	N° 2

Supply

• Rated Control Supply voltage Un		VAC
• Operating Range Voltage		V
• Rated Frequency Fn		Hz
• Rated Power Dissipation (Max for Phase) Pv		VA (W)

Overload Capacity

• Voltage Un	Continuous	V
	Momentary (1s)	V
• Current I_{max}	Continuous	A
	Momentary (10ms)	A

Display (Readouts)

• Display type	LCD	N° Digits
• Active Energy: 1 Display, 8 Digit	Digit Dimensions	mm x mm
+ Display import or Export (Arrow)	Tariffs 2	Wh
• Reactive Energy: 1 Display, 8 Digit	Overflow	MWh
+ Display import or Export (Arrow)	Tariffs 2	varh
• Instantaneous Active Power: 1 Display, 3 Digit	Overflow	Mvarh
• Instantaneous Reactive Power: 1 Display, 3 Digit		W, kW or MW
• Instantaneous Tariff Measurement	1 Display, 1 Digit	var, kvar or Mvar
• Transformer Primary Current		-
• Display Period Refresh		A
		S

Measuring Accuracy

• Active Energy and Power	Acc. to EN 50470-3	Class 1
• Reactive Energy and Power	Acc. to EN 62053-23	Class 2

Measuring Input

• Type of Connection			Direct
• Voltage Un	Phase/Phase	V	400
	Phase/N	V	230
• Operating Range Voltage	Phase/Phase	V	319 ... 480
	Phase/N	V	184 ... 276
• Current I_{ref}		A	5
• Current I_n		A	-
• Current I_{min}		A	0.25
• Operating Range Current: (I_{st} ... I_{max})	Direct Connection	A	0.015 ... 80
	transformer Connection (C _t)	A	-
• Transformer Current	Primary Current of the transformer	A	-
	Smallest Input Step Adjust. in 5 A Steps	A	-
• Frequency		Hz	50
• Input Waveform		-	Sinusoidal
• Starting Current for Energy Measurement (I_{st})		mA	20

Pulse Output 50

• Pulse Output	Acc. to EN 62053-31 for Act. and React. Energy 11 and 12	-
• Quantity Pulse Output	For Direct Connection 80A Depending on the Transf. Factor	Imp/kWh Imp/kWh
• Pulse Duration		ms
• Required Voltage	Min. (Max.)	VAC (DC)
• Permissible Current	Pulse ON (Max 230V AC/DC)	mA
• Permissible Current	Pulse OFF (Leak Cur. Max. 230V AC/DC)	uA

Direct Connection 125A

3 Modules
DIN Rail
70
EN 50470-1-3
EN 62053-23-31

2
Yes
T1 and T2

230
184 ... 276
50
<8 (0.9)

276
300
125
3750

8 (2 decimal)
6.00 x 3
0.01
999999.99
0.01
999999.99
000 ... 999
000 ... 999
11 or 12
-
2

3
2

Direct
400
230
319 ... 480
184 ... 276
5
-
0.25
0.015 ... 80
-
-
-
50
Sinusoidal
20

Technical Data (Cont'd)

Optical Interfaces

• Front Side (Accuracy Control)	LED	Imp/kWh	1000
---------------------------------	-----	---------	------

Safety Acc. to EN50470-1

• Indoor Meter			Yes
• Degree of Pollution		-	2
• Operational Voltage		V	300
• AC Voltage Test (IEC 60470-3, 7.7)		kV	4
• Impulse Voltage Test		10/50 μ s kV	6
• Protection Class (EN 50470)		Class	II
• Housing Material Flame Resistance	UL 94	Class	V0
• Safety-sealing between upper and lower housing part (Mod. 282331-282141)			Yes

Adaptor for Communication

• Plug and Play Technology			*
• LAN (ICP/P) Interface	Ethernet 802.3	-	10/100 Mbps
• Modbus RTU, ASCII Interface	RS-485 - 3 Wires	-	up to 19,200 bps
• M-Bus Interface	2 Wires	-	up to 9,600 bps
• DIB KNX Interface	DIB Standard	-	up to 9,600 bps
• SD-Card Datalogger		-	1 to 8 Gigabytes


Connection Terminals

• Type Cage Main Current Paths	Screw Head Z 1/4	POZ DRIVE	PZ2
• Type Cage Pulse Output	Blade for Slotted Screw	mm	0.8 x 3.5
• Terminal Capacity Main Current Paths	Solid Wire Min. (Max.)	mm ²	1.5 (35)
	Stranded Wire with Sleeve Min. (Max.)	mm ²	1.5 (35)
• Terminal Capacity Pulse Outlet	Solid Wire Min. (Max.)	mm ²	0.14 (2.5)
	Stranded Wire with Sleeve Min. (Max.)	mm ²	0.14 (1.5)

Environmental Conditions


• Mechanical Environment		-	M1
• Electromagnetic Environment		-	F2
• Operating Temperature		°C	0 ... +55
• Limit Temperature of Transportation/Storage		°C	-25 ... +70
• Relative Humidity (Not Condensation)		%	≤80
• Vibrations	50Hz Sinusoidal Vibration Amplitude	mm	+0.075
• Degree Protection	Housing when mounted in front (term.)		IP51 (*) / IP20

Display

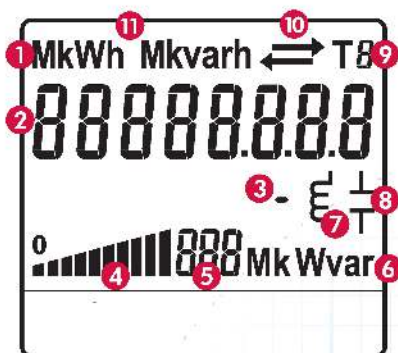

- 1 (M)-(k)-Wh Display
- 2 Energy Value
- 3 Displays if Balance Energy is Negative
- 4 Consumption Bar Display (Percentage of P_{max})
- 5 Running Active or Reactive Power Display
- 6 Power Unit
- 7 Displays Inductive and Reactive Power
- 8 Displays Capacitive and Reactive Power
- 9 Running Tariff
- 10 Power Import (absorbed -->) / Power Export (supplied <--)
- 11 kvarh Display

Dimensions

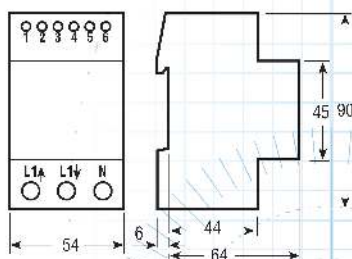

Circuit Diagrams

