

AD3-80MC

Energy Meters Three-Phase

Application

The energy-meters "with a green back-lighted LCD screen for perfect reading" are used to measure three-phase systems or single-phase like in Residential, Utility and Industrial applications.

Monitoring of the energy-consumption goes via a S0 pulse output. The products can be set up to communicate with the Modbus RS485 Autometers Protocol V6 interface, used to analyze the energy-consumption to reduce the running cost to a minimum for Industrial plants and buildings like Offices, Hospitals, Universities etc.



Overview

Active energy-meters for three-phase alternating current with either 2, 8 digits digital counters.

These meters have 2 S0 output generating pulses for remote processing of the instantaneous energy active and reactive measurements for 2 tariff.

Function

Display		Unit	ID
Active Energy	Tariff 1	(M) (k) Wh	Energy absorbed or supplied
	Tariff 2	(M) (k) Wh	Energy absorbed or supplied
Reactive Energy	Tariff 1	(M) (k) varh	Energy absorbed or supplied
	Tariff 2	(M) (k) varh	Energy absorbed or supplied
Active Power		(M) (k) W	Utilisation and Instantaneous Value
Reactive Power		(M) (k) varh	Utilisation and Instantaneous Value
Connection Errors			Phase I Err

Communication Modules



Modbus RS485
Autometers Protocol V6

4 Standard Module Housing

Suitable for DIN Rail Mounting Direct Connection 80 A

Terminals S0 Pulse Outlet and Tariffs Change Command

Technical Data

Data in compliance with EN 50470-3, EN 50470-3, EN 62053-23 and EN 62053-31

General Characteristics

• Housing	DIN 43880	DIN	4 Modules
• Mounting	EN 60715	35mm	DIN Rail
• Depth		mm	70
• Reference Standard	Active Energy Reactive Energy - Pulse Output	-	EN 50470-1-3 EN 52053-23-31

Operating Features

• Connectivity	o Single/Three-phase Network	N° Wires	3-4
• Storage of Energy Values and Configuration	Digital Display (EEPROM)		Yes
• Display Tariffs Identifier	For Active & Reactive Energy	N° 2	T1 and T2

Supply

• Rated Control Supply Voltage Un		VAC	230
• Operating Range Voltage		V	184 ... 276
• Rated Frequency Fn		Hz	50
• Rated Power Dissipation (Max for Phase) Pv		VA (W)	<8 (0.9)

Overload Capacity

• Voltage Un	Continuous: Phase/Phase	V	480	
	1 Second: Phase/Phase	V	800	
	Continuous: Phase/N	V	276	
	1 Second: Phase/N	V	460	
	• Current I_{max}	Continuous	A	80
		Momentary (0.5s)	A	-
Momentary (10ms)		A	2400	

Display (Readouts)

• Connection Errors & Phase Out	Discernible from Phase Sequence Indic.	-	Phase Err
• Display Type	LCD	N° Digits	8 (2 decimal)
	Digit Dimensions	mm x mm	6.00 x 3
• Active Energy: 1 Display, 8 Digit	Tariffs 2	Wh	0.01
+ Display Import or Export (Arrow)	Overflow	MWh	999999.99
• Reactive Energy: 1 Display, 8 Digit	Tariffs 2	varh	0.01
+ Display Import or Export (Arrow)	Overflow	Mvarh	999999.99
• Instantaneous Active Power: 1 Display, 3 Digit		W, kW or MW	000 ... 999
• Instantaneous Reactive Power: 1 Display, 3 Digit		var, kvar or Mvar	000 ... 999
• Instantaneous Tariff Measurement	1 Display, 1 Digit		T1 or T2
• Transformer Primary Current		A	-
• Display Period Refresh		S	1

Measuring Accuracy

• Active Energy and Power	Acc. to EN 50470-3	Class 1	3
• Reactive Energy and Power	Acc. to EN 62053-23	Class 2	2

Measuring Input

• Type of Connection			Direct	
• Voltage Un	Phase/Phase	V	400	
	Phase/N	V	230	
	Operating Range Voltage	Phase/Phase	V	319 ... 480
	Phase/N	V	184 ... 276	
• Current I_{ref}		A	5	
	• Current I_n		A	-
	• Current I_{min}		A	0.25
• Operating Range Current (I_{st} ... I_{max})	Direct Connection	A	0.015 ... 80	
	Transformer Connection (CT)	A	-	
	Transformer Current	Primary Current of the Transformer	A	-
	Smallest Input Step Adjust. in 5 A Steps	A	-	
• Frequency		Hz	50	
• Input Waveform		-	Sinusoidal	
• Starting Current for Energy Measurement (I_{st})		mA	15	

Pulse Output 50

• Pulse Output	Acc. to EN 62053-31 for Act. and React. Energy T1 and T2		Yes
• Quantity Pulse Output	For Direct Connection 80A	Imp/kWh	500
	Depending on the Transf. Factor	Imp/kWh	-
• Pulse Duration		ms	30 ± 2ms
• Required Voltage	Min. (Max.)	VAC (DC)	5 ... 230 ± 5% (5 ... 300)
• Permissible Current	Pulse ON (Max 230V AC/DC)	mA	90
• Permissible Current	Pulse OFF (Leak Cur. Max. 230V AC/DC)	uA	1

Technical Data (Cont'd)

Optical Interfaces

• Front Side (Accuracy Control)	LED	Imp/kWh	1000
---------------------------------	-----	---------	------

Safety Acc. to EN50470-1

• Indoor Meter			Yes
• Degree of Pollution		-	2
• Operational Voltage		V	300
• AC Voltage Test (EN 50470-3, 7.7)		kV	4
• Impulse Voltage Test		1.2/50 μ s kV	6
• Protection Class (EN 50470)		Class	II
• Housing Material Flame Resistance	UL 94	Class	V0
• Safety-sealing between upper and lower housing part (Mod. 282331-282141)			Yes

Adaptor for Communication

• Plug and Play Technology			*
• LAN (ICP/P) Interface	Ethernet 802.3	-	10/100 Mbps
• Modbus RTU, ASCII Interface	RS-485 - 3 Wires	-	up to 19,200 bps
• M-Bus Interface	2 Wires	-	up to 9,600 bps
• DIB KNX Interface	DIB Standard	-	up to 9,600 bps
• SD-Card Datalogger		-	1 to 8 Gigabytes

Connection Terminals

• Type Cage Main Current Paths	Screw Head Z 1/-	POZ DRIV	PZ2
• Type Cage Pulse Output	Blade for Slotted Screw		0,8 x 3,5
• Terminal Capacity Main Current Paths	Solid Wire Min. (Max.)	mm ²	1,5 (35)
	Stranded Wire with Sleeve Min. (Max.)	mm ²	1,5 (35)
• Terminal Capacity Pulse Outlet	Solid Wire Min. (Max.)	mm ²	0,14 (2,5)
	Stranded Wire with Sleeve Min. (Max.)	mm ²	0,14 (1,5)



Environmental Conditions

• Mechanical Environment		-	M1
• Electromagnetic Environment		-	EP2
• Operating Temperature		°C	-10 ... +55
• Limit Temperature of Transportation/Storage		°C	-25 ... +70
• Relative Humidity (Not Condensation)		%	≤80
• Vibrations	50Hz Sinusoidal Vibration Amplitude	mm	+0.075
• Degree Protection	Housing when mounted in front (term.)		IP51(*) / IP20

Circuit Diagrams

3 Phase 4 Wire Connection Diagram

1 Phase 2 Wire Connection Diagram

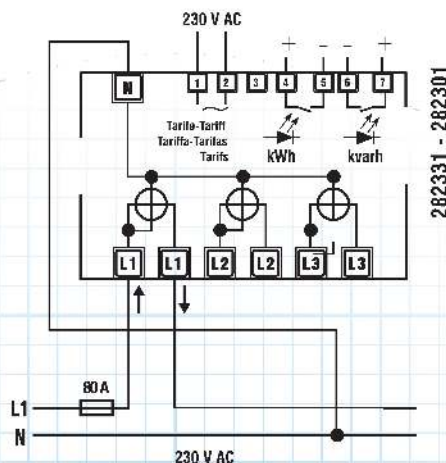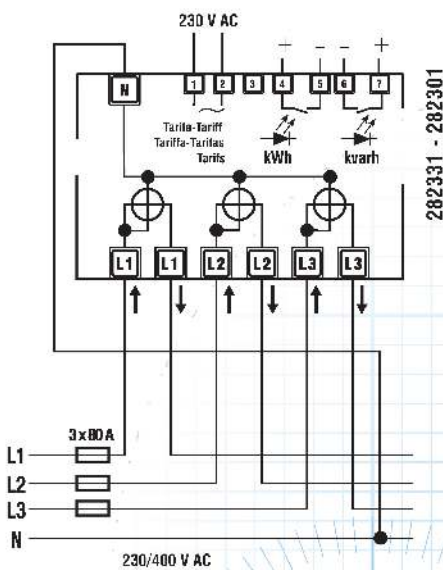

Dimensions

